



SAFETY SHOWERS & EYEBATHS

SHOWERS AND EYEBATHS SERVICES



GFS1F & GFS3F mains fed shower Corrosion Resistant Showers



CH01

Manufactured from GRP Yellow outer case, ABS pipe work and stainless steel which are corrosion resistant materials, giving superior strength; a long life, and suitability for outside use.

Designed to be highly visible for ease of identification and work first time every time. These units are self draining and therefore ideal for any environment.

Available for non hazardous and hazardous areas. ATEX & GOST Certified.

KEY FEATURES

Self Draining Unit - Water in shower can not freeze or overheat
2-3 bar water supply pressure recommended to give unit 76lpm

No risk of Legionella

Stainless base plate-304

Stainless & ABS internal pipework

Stainless fittings & Valves

1" BSPF Stainless inlet (flanged inlets available as an option)

Stainless panic bar shower operation

Stainless testing lever

Highly visible robust outer jacket- YELLOW GRP reduces solar gain & physical damage)


Rigid Pictorial Safety sign & green & white stripes

3 x Stainless Spray nozzles (overhead, body & lower body)- MODEL GFS3F

OR

1 x Stainless overhead Rose - MODEL GFS1F

Manufactured to ANSI Z358.1-2009 specifications

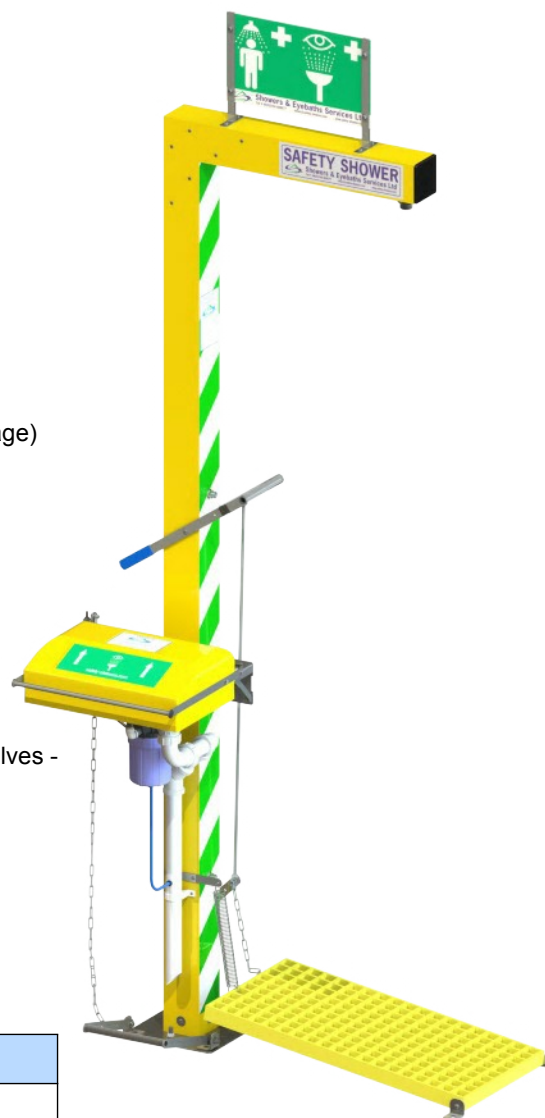

For temperatures below -5 deg C we recommend frost protection for the operating valves - see model GFS1H or GFS3H - Trace heating units.

Optional Extras		
Eyebath(on LHS)	Remote alarms	Alarm & Siren
Shower walk on Platform	Scald Valve	Eyebath foot treadle
Pendant Lamp	Frost Protection	Pressure reg.valve
Flanged Inlets	Strainer	

WWW.SAFETY-SHOWERS.COM



Certificate No. 6974